



# Rotative Pump

# PR Series

### APPLICATION:

Professional coffee machines  
 Cooling systems  
 Professional machines with food fluids  
 Water treatment  
 Water dispensers

### SPECIFICATIONS:

Outlet	G 3/8 - 3/8 NPT (on request)
Fluids	Water and food fluids
Max Ambient Temperature	70°C
Max Fluid Temperature	70°C
Dead head Pressure	See graphich
Free Flow Rate	See graphich
Limit speed rotation	11720 rpm
Life	5000 hours

### MATERIALS:

Body	PPS
Pumping chamber	Graphite
Rotor	Stainless Steel series 300
Spring	Stainless Steel series 300
Seals	EPDM/FKM
Seal shaft seal	PTFE + Graphite/Ceramic




Proven sealing system for reliable and long life application

### CERTIFIED BY:

Regulation (EC) n. 1935/2004  
 NSF169 Certified

Code	l/h [16bar]	Graphic	Weight g
PR100PE3G0900-T0	100	A	510
PR150PE3G0900-T0	150	B	
PR200PE3G0900-T0	200	C	
PR300PE3G0900-T0	270	D	

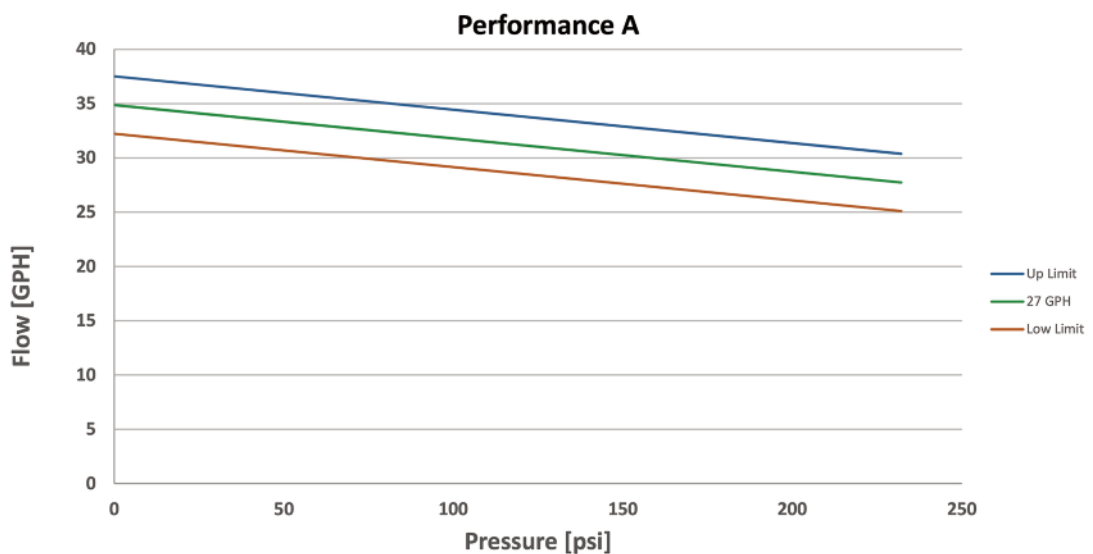


### Note


Elastomers EPDM | Standard or balanced bypass valve | Available on request and with minimum quantities.

The "ODE" reserves the right to carry out and aesthetic modifications without prior notice.


### Performance B

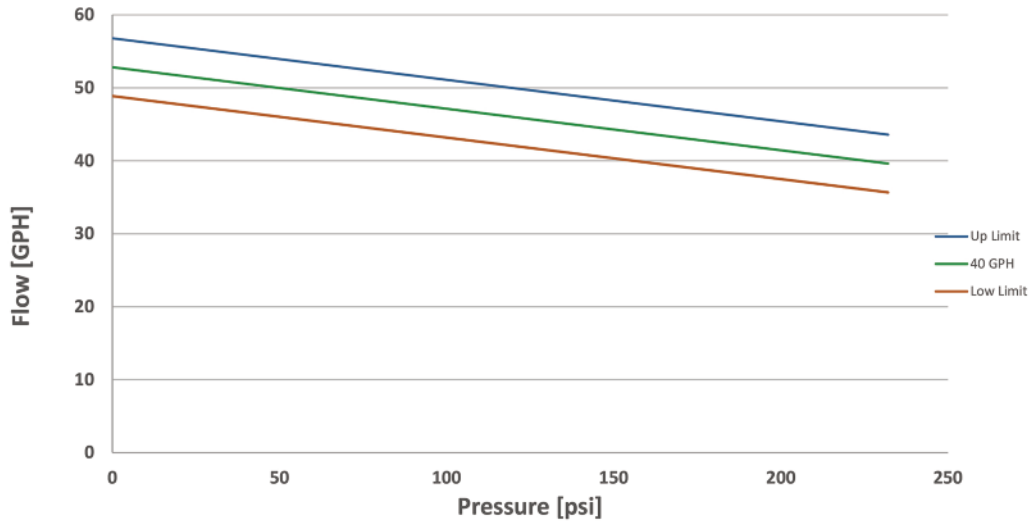

### Performance C

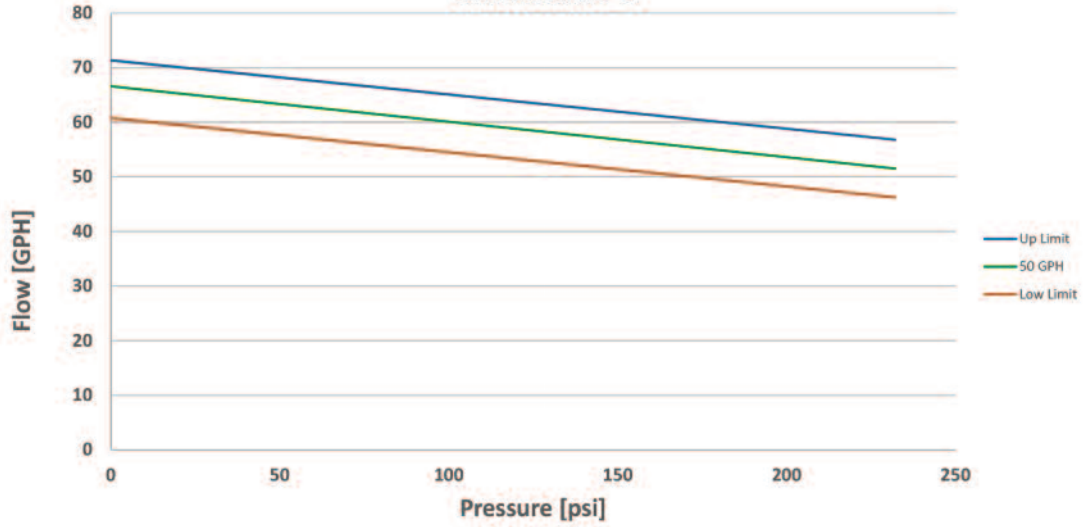

### Performance D

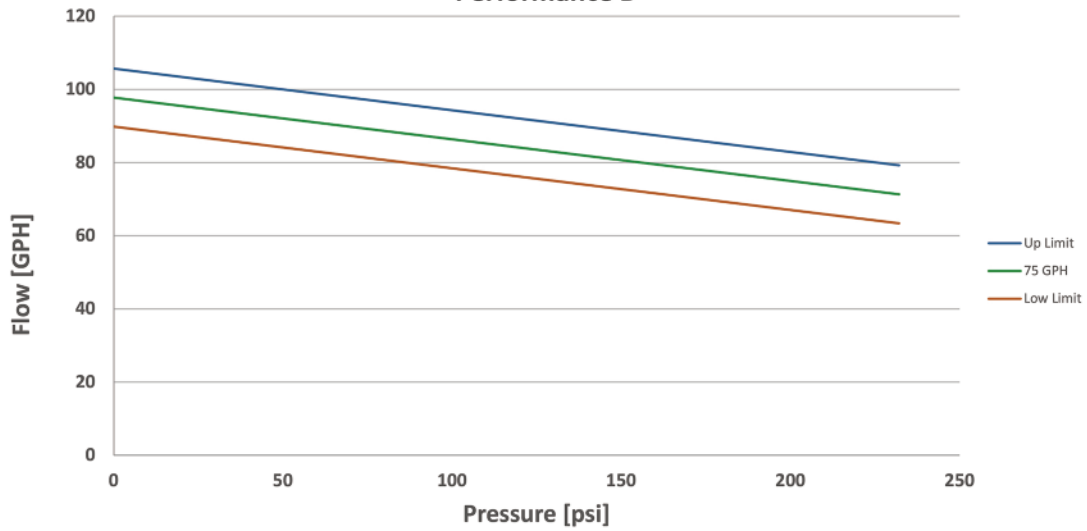



DIMENSIONS:

